



HOLD HSW313E

Warm holding drawers with
separate controls

CONSTRUCTION FEATURES

- 3 Water tight cavities with radiused corners
- Total thermic insulation with rock or glass wool
- Long lasting drawers seals made up of food grade of high heat resistance
- Static heating provided by low consumption wire heating element that coils up all the chamber
- Ergonomic and fully built-in drawers handle with magnetic closure

FUNCTIONAL FEATURES

- Three electronic control of the temperature
- Operating temperature 30° ÷ 120°C
- Adjustable moisture vent on the drawer
- Safety thermostats on each cavity
- Manual keyboard lock

STANDARD SUPPLY

- Removable GN1/1 tray racks
- Adjustable feet

OPTIONS & ACCESSORIES

- ☐ Set wheels
- ☐ Grids
- ☐ Trays
- ☐ UK plug

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
 tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it

TECHNICAL INSTALLATION DIAGRAM




Electricity supply
cable inlet



Humidity exhaustion
vent



Important - Drawing and
dimensions refer to the
standard version.
They may change with the
addition of accessories or
options.

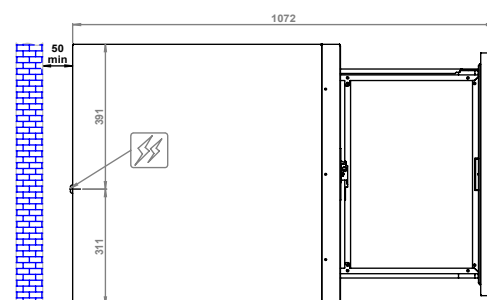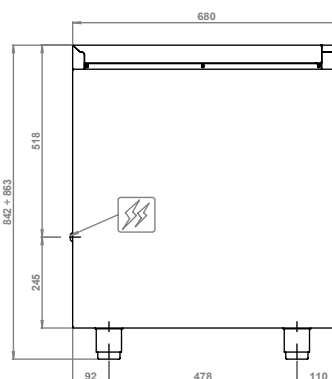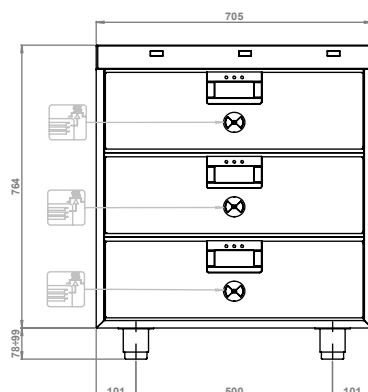

Overall dimensions
(W x D x H) - mm

705 x 680 x 842+863h

Trays capacity

3 GN 1/1

Power supply

AC 220-240V 50/60Hz

Containers max height
[mm]

150

Total input
[kW]

2,1 (230V)

Product max capacity
[Kg]

18

Amps.
[A]


9,2 (230V)

Net weight
[Kg]

100

Working temperature
[°C]

30 ÷ 120

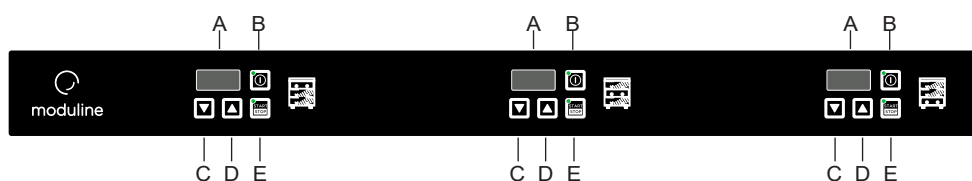

- A Display
- B ON/OFF switch
- C Temperature decrease key
- D Temperature increase key
- E START/STOP key

MODULINESRL

Via dell'Industria 11, Z.I. San Giacomo di Veglia 31029 Vittorio Veneto (TV) - ITALY
tel. +39 0438 5063 - fax +39 0438 912 323 - info@moduline.it - www.moduline.it